




4W Ku-Band Block Up Converter


KEY FEATURES

- ◆ Small package size and weight
- ◆ Feed horn mounting
- ◆ Powered through IF cable
- ◆ Low power consumption (<45W)
- ◆ High power efficiency (4W min @P1dB over temperature)
- ◆ Side Connector
- ◆ 14.00-14.50GHz/13.75-14.25GHz/13.75-14.50GHz Options
- ◆ RoHS Compliant
- ◆ Two year Warranty

Mechanical Drawing

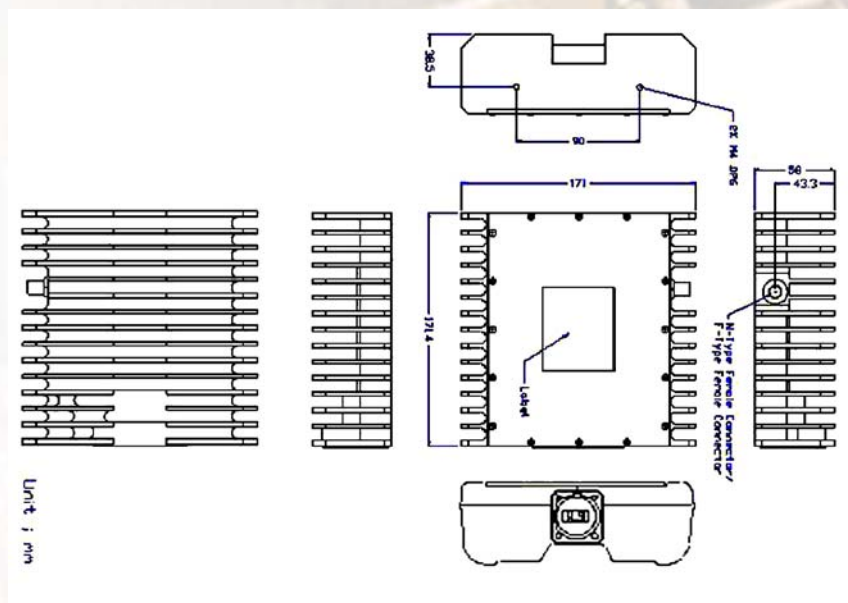

ABA4KUS
ABA4KULS
ABA4KUXS

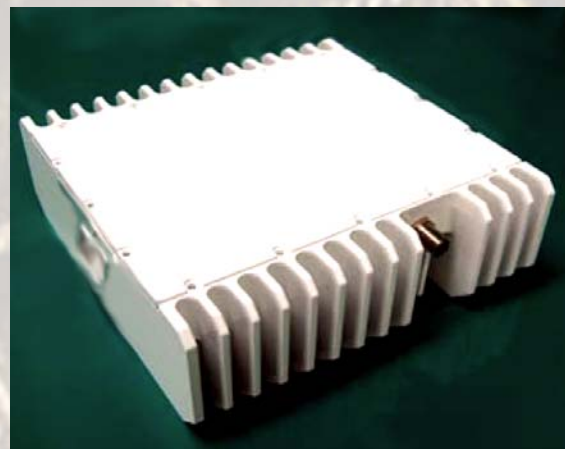

This small and light weight 4W L-to Ku-Band Block Up Converter is designed to be mounted on the feed horn. High power efficiency resulting in low current (<=2 amps) consumption allows user to pass DC supply voltage via IF cable. The unit is ideal for network and point to point, data distribution, portable and emergency applications.



4W Ku-Band Block Up Converter

TECHNICAL SPECIFICATIONS		
RF Frequency	ABA4KUS ABA4KULS ABA4KUXS	14.00 to 14.50 GHz 13.75 to 14.25 GHz 13.75 to 14.50 GHz
Local Oscillator	ABA4KUS ABA4KULS ABA4KUXS	13.05 GHz 12.80 GHz 12.80 GHz
IF Frequency		950 to 1,700 MHz
Output Power @ P1dB min over temperature		4W Linear (+37 dBm min.)
IF Connector		N-Type or F-Type
Power Supply		+15 VDC~+24 VDC via IF Cable 45 W Max
Output Interface		WR-75 Grooved
Linear Gain		60 dB nominal
Gain Variation	Over 40 MHz Over 575 MHz	1.0 dB p_p 4.0 dB p_p
Over Operating Temperature		4.0 dB p_p @ Fixed Frequency
Requirement for External Reference		via IF cable
	Frequency	10 MHz (sine-wave)
	Input Power	-5 to +5 dBm @ Input port
Phase Noise		-30 dBc/Hz max. @ 10 Hz
		-60 dBc/Hz max. @ 100 Hz
		-70 dBc/Hz max. @ 1 kHz
		-80 dBc/Hz max. @ 10 kHz
		-90 dBc/Hz max. @ 100 kHz
		-100 dBc/Hz max @ 1 MHz
Noise Figure		20 dB max
Input V.S.W.R.		2 : 1 max
Output V.S.W.R.		2 : 1 max.
Mute		Shut off the BUC in case of L.O. unlocked
Input Interface	ABA4KUS ABA4KUSF	50 Ohm (N-type IF In) 75 Ohm (F-type IF In)
Temperature Range (ambient)		
	Operating	-40 deg C to +55 deg C
	Storage	-40 deg C to +75 deg C
Dimensions & Housing		172.4 (L) x 171 (W) x 58 (H) mm
		6.89" (L) x 6.84" (W) x 2.32" (H)
Weight		1.9 kg (4.18 lbs) max