




Twists

PENN ENGINEERING offers a line of waveguide Twists for changing the polarization in a waveguide system. Twists are left-handed as standard.

VSWR is 1.05:1 typ. over the full bandwidth. Brass units are Silver Plated per QQ-S-365D Class A. Aluminum units are Chem-filmed per MIL-C-5541E. Both are finished with PENN ENGINEERING'S Metallic Blue Paint.

Special Twists are available upon request.




Right-Handed Model Shown.

90 Degree Model	45 Degree Model	Waveguide Size	Frequency Range(GHz)	Insertion Length
3056	3156	WR 284	2.60-3.95	10.0
3054	3154	WR 229	3.30-4.90	10.0
3052	3152	WR 187	3.95-5.85	8.0
3050	3150	WR 159	4.90-7.05	8.0
3048	3148	WR 137	5.85-8.20	8.0
3046	3146	WR 112	7.05-10.0	6.0
3044	3144	WR 102	7.00-11.0	6.0
3042	3142	WR 90	8.20-12.4	6.0
3040	3140	WR 75	10.0-15.0	5.0
3038	3138	WR 62	12.4-18.0	5.0
3036	3136	WR 51	15.0-22.0	4.0
3034	3134	WR 42	18.0-26.5	3.0
3032	3132	WR 34	22.0-33.0	3.0
3030	3130	WR 28	26.5-40.0	3.0
3028	3128	WR 22	33.0-50.0	2.0
3024	3124	WR 15	50.0-75.0	2.0
3022	3122	WR 12	60.0-90.0	2.0
3020	3120	WR 10	75.0-110.0	2.0

ORDERING INFORMATION - TO ORDER, USE THE FOLLOWING EXAMPLE:

MODEL 3042-11B Is a WR-90 Twist 90 deg. with cover flanges in brass

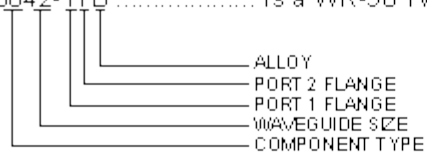

ALLOY: A= ALUMINUM B=BRASS C=COPPER S=SILVER SS=STAINLESS STEEL
FLANGE: 1=COVER 2=CHOKE 3=CMR 4=CPRG 5=CPRF

Penn Engineering Sales and Information

Phone: 661-295-2080

Fax: 661-295-2084

Postal Address:

29045 Avenue Penn
Valencia, California U.S.A.

Sales E-mail: sales@pennengineering.com

Technical Information: tech@pennengineering.com



[Home](#) | [About Us](#) | [Contact Us](#) | [Products](#)